

Brooks® QUANTIM® Low Flow Coriolis Precision Mass Flow Measurement and Control



NEMA 1 / IP40
1/4" VCR Configuration



NEMA 4X / IP65
Weather Proof
Configuration



IP65XP
Explosion Proof
Configuration



*"QUANTIM Coriolis mass flow controllers
enable precision measurement and control with
maximum flexibility and lowest overall cost of ownership."*

QmB Series IP40, IP65, IP65XP

Brooks® QUANTIM® Low Flow Coriolis Precision Mass Flow Measurement and Control

Brooks QUANTIM family of products are the smallest lowest flow Coriolis meters and controllers available on the market. With a footprint the size of a handheld organizer, you can fit this instrument into any tight space. With a range of 0.001 to more than 40 kg/hr, you can measure mass or volume flow and density or temperature for drops of liquid, slurries, or gas. QUANTIM offers unsurpassed accuracy and unmatched zero stability in demanding low flow applications.

QUANTIM provides precision mass flow measurement, integral control, on line density and temperature measurement all in one compact package. The heart of the device is a patented Coriolis sensor design which measures low flows independent of the fluid type or process variables. This provides you with unsurpassed performance in even the most challenging low flow applications.

Most critical processes require control as well as measurement, therefore QUANTIM offers an optional integrally mounted, in-line control valve. No remote electronics are required as all the transmitting and control electronics are contained within the product housing.

Available with a variety of options and global approvals the Brooks QUANTIM meters and controllers provide unsurpassed performance, solving specific challenges in demanding low-flow applications.

APPLICATIONS

Available for general purpose, hose down or hazardous area requirements, the Brooks QUANTIM family of products have been designed to accurately measure and control low flow rates for virtually any process fluid, independent of its characteristics without the need for conversion factors. It has been designed for low flow applications in the demanding specialty chemical, petrochemical, pharmaceutical, semiconductor, analytical, laboratory and OEM markets. Brooks QUANTIM precisely measures and controls process fluids like catalysts, food additives, chemical vapor deposition precursors, hydrocarbons, inhibitors, nutrients, and other critical process fluids.

Brooks Instrument

Brooks Instrument provides products, custom solutions and services tailored to your specific needs.

The Brooks Instrument Laboratory Certification confirms the Brooks QUANTIM measurement accuracy to the industries highest levels for low flow rates. This translates to better process control allowing tighter process tolerances and improved yields ultimately reducing waste and rework.

The Quality System at Brooks Instrument conforms to the quality standards set forth in ISO 9001: 2000. Brooks is known worldwide as offering the best low flow measurement and control solutions for your process needs.

Data Sheet

DS-CM-QmB-eng

May, 2008

QmB Series IP40, IP65, IP65XP

FEATURES	BENEFITS
Lowest flow Coriolis meter or controller available.	Brooks QUANTIM meets the demands of ultra low flow direct mass measurement and control, where Coriolis flow measurement has never been available before.
Multiple functions including, Coriolis mass flow sensor, transmitter, in-line valve and PID control electronics in a single compact package.	One stop shopping and simplified installation.
Industry leading mass flow measurement precision.	Provides accurate mass measurement of your fluids in demanding low flow processes, research and pilot plant applications.
Direct (not inferred) mass flow measurement.	Process chemistry and/or process conditions can be altered without the need to change or recalibrate the measurement system, providing the user with maximum flexibility.
Diagnostic alarms and warnings	Provides early indication of potential process issues so preventive actions can be taken.
No internal moving parts.	Minimizes maintenance requirements and over all cost of ownership.
Small physical size.	Easily integrated into the most intricate process systems.
Multivariable output including: Mass Flow or Volumetric Flow and Density or Temperature.	Multiple outputs from a single device improves and simplifies process monitoring and diagnostics, further reducing cost of ownership.
Gas, liquid and slurry measurement and control capability in one package.	The ultimate in process flexibility.
Variety of options, enclosure types and area classifications available.	The right product for your application.

QmB Series IP40, IP65, IP65XP

SPECIFICATIONS

Performance Specifications:**Flow****Liquid Flow Specifications, Metric Units⁽⁸⁾**

Product Type	QUANTIM Model ⁽¹⁾	QUANTIM Tube Size	Maximum Flow Rate ⁽²⁾	Nominal Flow Rate ⁽²⁾	Minimum Full Scale	Minimum Measurable Flow
			Kg/hr or l/hr	Kg/hr or l/hr	Kg/hr or l/hr	Kg/hr or l/hr
Controller	QMBC	2	0.30	0.15	0.01	0.001
		3	1.00	0.78	0.10	0.010
		4	15.94	7.97	1.00	0.100
Meter	QMBM	2	0.38	0.19	0.01	0.001
		3	1.00	1.00	0.10	0.010
		4	27.00	13.50	1.00	0.100

Liquid Flow Specifications, English Units⁽⁸⁾

Product Type	QUANTIM Model ⁽¹⁾	QUANTIM Tube Size	Maximum Flow Rate ⁽²⁾		Nominal Flow rate ⁽²⁾		Minimum Measurable Flow
			lb/hr	gal/hr	lb/hr	gal/hr	lb/hr
Controller	QMBC	2	0.66	0.08	0.33	0.04	0.002
		3	2.21	0.26	1.72	0.21	0.022
		4	35.15	4.21	17.57	2.11	0.221
Meter	QMBM	2	0.84	0.10	0.42	0.05	0.002
		3	2.21	0.26	2.21	0.26	0.022
		4	59.54	7.13	29.77	3.57	0.221

Gas Flow Specifications

Product Type	QUANTIM Model ⁽¹⁾	QUANTIM Tube Size	Nominal Mass Flow Rate		Nominal Volume Flow Rate		
			lb/hr	Kg/hr	scfh ⁽³⁾	sccm ⁽³⁾	ml/min ⁽⁴⁾
Controller	QMBC	2	0.168	0.076	2.227	1051	975.2
		3	0.472	0.214	6.261	2955	2743
		4	3.960	1.796	52.52	24787	23009
Meter	QMBM	2	0.227	0.103	3.034	1432	1329
		3	0.893	0.405	11.86	5595	5193
		4	8.467	3.840	112.6	53116	49319


Data Sheet

DS-CM-QmB-eng
May, 2008

QmB Series IP40, IP65, IP65XP

Gas Flow Limits

Air, 70°F (21°C), 14.5 psi (1 bar) pressure drop

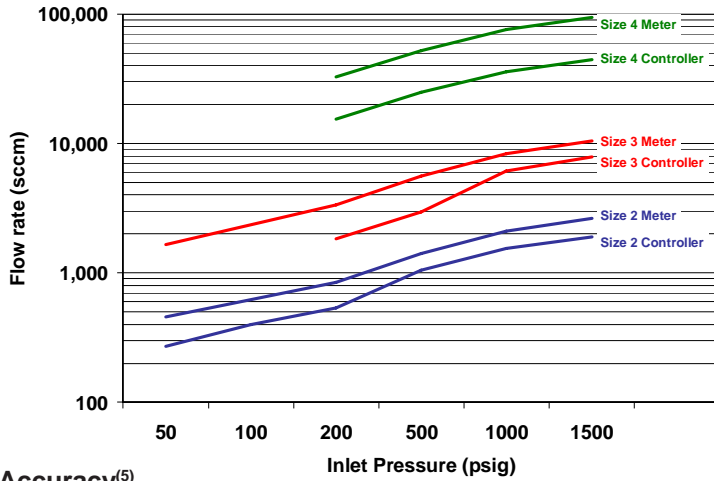

Accuracy⁽⁵⁾

± measurement accuracy % of rate or [(zero stability/flowrate) x 100] % of rate, which ever is greater


Measurement Accuracy

Sensor Tube Material	Fluid Type	Standard Flow Measurement Accuracy (% of rate)	Optional Flow Measurement Accuracy (% of rate)
Stainless Steel	Liquid	0.2%	0.5%
	Gas	0.5%	1.0%
Hastelloy	Liquid	0.5%	1.0%
	Gas	0.5%	1.0%

Zero Stabilities

Sensor Tube Material	Tube Size	Zero Stability (Kg/hr)	Zero Stability (Lb/hr)
Stainless Steel	2	0.00013	0.0003
	3	0.0010	0.0022
	4	0.0040	0.0088
Hastelloy	2	0.0002	0.0004
	3	0.0015	0.0033
	4	0.0120	0.0265

Standard Measurement Accuracy vs Flow Rate Chart, Tube Size 2

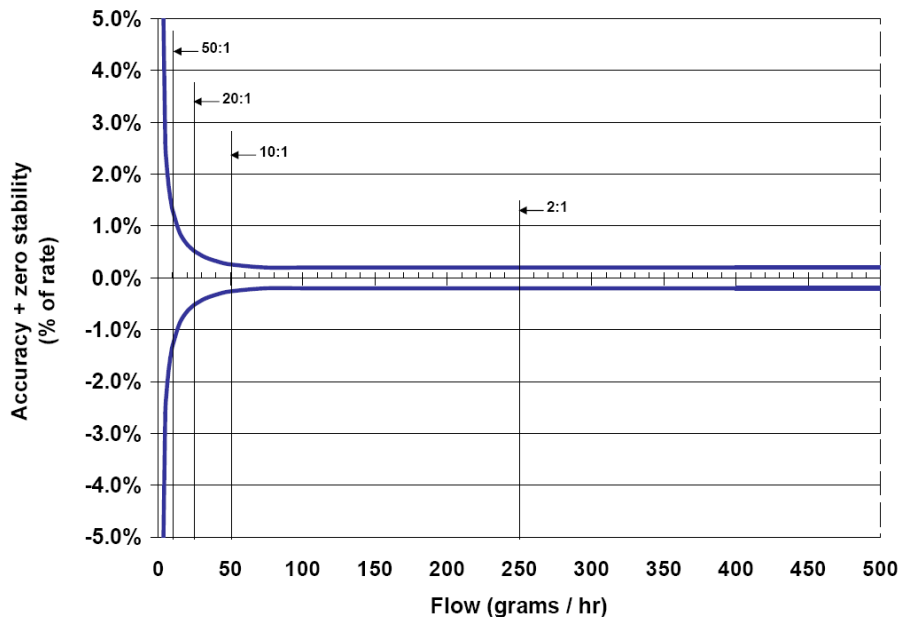

QmB Series IP40, IP65, IP65XP

Repeatability⁽⁶⁾:

± 0.05% or ± [0.5 x (zero stability/flowrate) x 100]% of rate whichever is greater

Device Leak Integrity:

Elastomer Sealed Device: Outboard 1 x 10⁻⁹ atm. cc/sec., helium (maximum)
 Metal Sealed Device: 1 x 10⁻¹⁰ atm. cc/sec., helium (maximum)

Turn Down:

Controller: 100:1 or down to the minimum measurable flow, whichever flow rate is greater
 Meter: to minimum measurable flow

Settling Time:

Controller (Stainless Steel sensor tube): Less than 2 seconds within 2 % full scale of final value, ± [(zero stability/flowrate) x 100]% of rate per SEMI Guideline E17-91
 Controller (Hastelloy sensor tube): Less than 12 seconds within 2 % full scale of final value per SEMI Guideline E17-91
 Meter: Less than 0.5 seconds within 2 % full scale of final value, ± [(zero stability/flowrate) x 100]% of rate per SEMI Guideline E17-91

Maximum Operating Pressure:

Standard: 3.5 MPa, 35 bar or 500 psi
 Optional: 10 MPa, 100 bar or 1500 psi
 Optional: 30 MPa, 300 bar or 4500 psi (Hastelloy sensor tube only)


Differential Pressure Requirements, Controller ⁽⁷⁾

QUANTIM	QUANTIM	Liquid						Gas					
		KpA		bar		psi		KpA		bar		psi	
		min	max*	min	max*	min	max*	min	max*	min	max*	min	max*
Model ₍₁₎	Tube Size												
QMBC	2	69	1034	0.7	10.3	10	150	69	1724	0.7	17.2	10	250
	3	69	1379	0.7	13.8	10	200	69	1034	0.7	10.3	10	150
	4	69	1379	0.7	13.8	10	200	69	1034	0.7	10.3	10	150

* Actual maximum pressure drop will depend on process conditions and orifice selection.

Differential Pressures, Meter⁽⁷⁾

Pressure Drop Liquid - (H₂O)

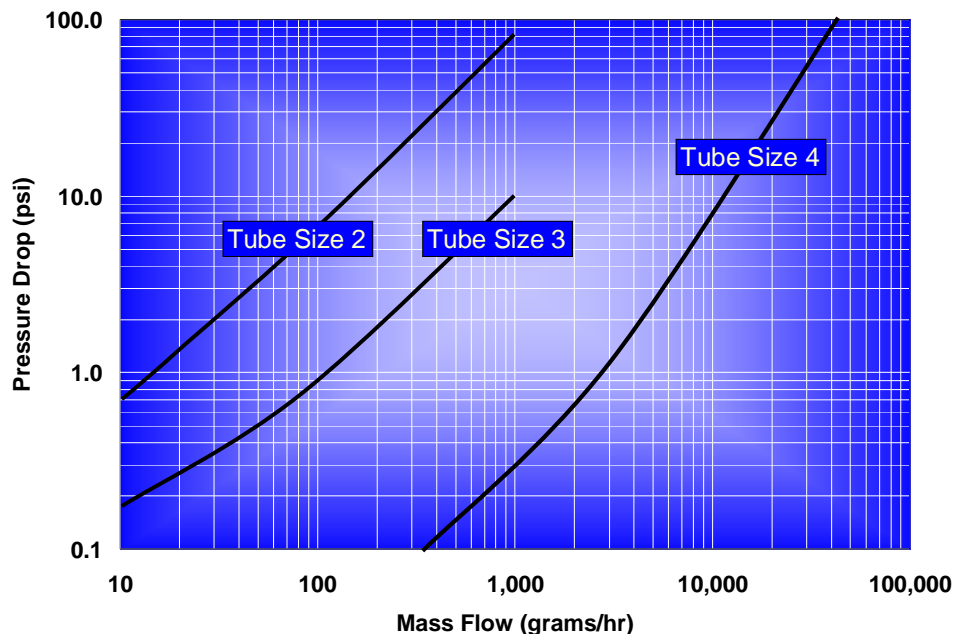


Data Sheet

DS-CM-QmB-eng
May, 2008

QmB Series IP40, IP65, IP65XP

Pressure Drop Air @ 500 psi Inlet Pressure

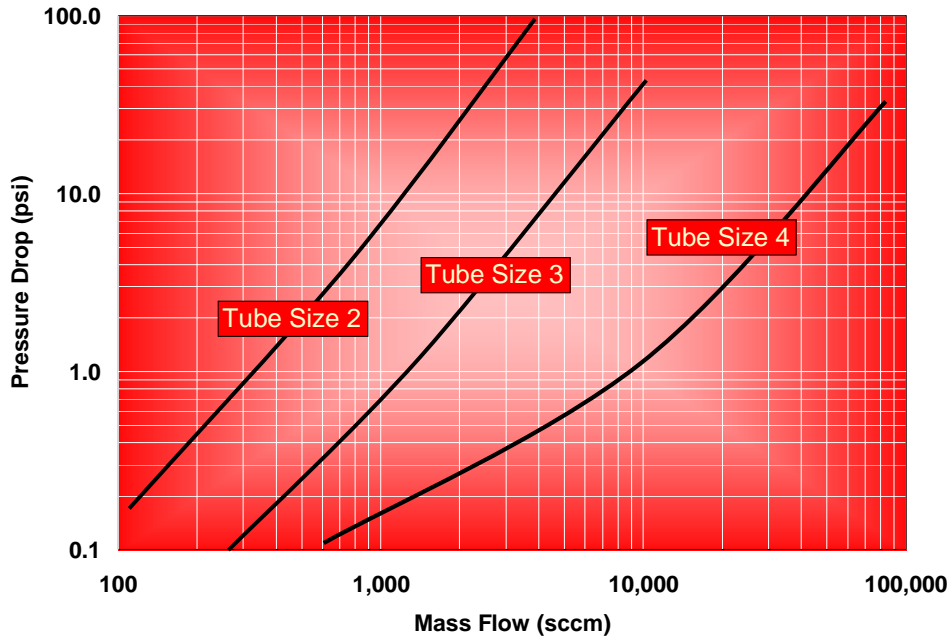

Density⁽⁸⁾:

Range:	0 to 2.0 grams/cc
Accuracy:	±0.005 grams/cc
Repeatability:	±0.002 grams/cc

Temperature⁽⁹⁾

Device Temperature Range:	0 to 65°C or 32 to 149°F
Accuracy:	± 0.5°C or ± 1.0°F

Notes

- (1) QMBC - Brooks QUANTIM controller with integral control valve. QMBM - Brooks QUANTIM meter (no valve).
- (2) The nominal flow rate is the flow rate at which water at reference conditions causes approximately 1 bar of pressure drop or the laminar to turbulent transition flow whichever is lower. Maximum flow rate is twice nominal flow rate or the laminar to turbulent transition flow whichever is lower.
- (3) Standard volumetric conditions are 14.696 psia and 70°F.
- (4) ml_n/min Reference Conditions 0°C at 1013.25 mbar.
- (5) Accuracy includes combined repeatability, linearity, and hysteresis. Specifications are based on reference test conditions of water/nitrogen at 68 to 77°F (20 to 25°C) and 15 to 30 psig (1 to 2 bar).
- (6) Repeatability- The maximum difference between output readings when the same input is applied consecutively; the closeness of agreement among consecutive measurements of an output for the same value of input under the same operating conditions, approaching from the same direction.
- (7) Differential pressures are based on reference conditions of water and air at 68 to 77°F (20 to 25°C).
- (8) For applications with fluid density in the range from 0.3 to 0.5 grams/cc the device may be sensitive to 50Hz or 60Hz vibration. The density measurement at temperatures other than 21° C (70° F) has an additional error of approximately 0.0005 grams/cc per deg C.
- (9) A temperature rise of up to 20°C (68°F) from internal heating can occur in an open environment where ambient temperature is 23°C (73°F).

QmB Series IP40, IP65, IP65XP

Physical Specifications

Materials of construction:	Process Wetted: 316L, 316L VAR, High Alloy Ferritic Stainless and 17-7PH Optional: Hastelloy sensor tube. Process Seals: Elastomer Seal: Viton® fluoroelastomers, Buna, Kalrez® or EPDM Metal Seal: Stainless Steel and Nickel
Housing:	IP40: Polyurethane painted Aluminum IP65: Polyurethane painted Aluminum IP65XP: Aluminum
Inlet Filter:	Tube Size 2 Controller: 1 micron or 10 micron inlet filter recommended Tube Size 3 or 4: 10, 20, 30 & 40 micron filters available
Weight:	Housing: IP40: 1.6 kg or 3.5 Lbs. Housing IP65: 1.9 kg or 4.2 Lbs. Housing IP65XP: 24 kg or 52 Lbs.
Moisture content:	Purged to exhaust dew point less than -40°C (-40°F) prior to shipment to remove calibration liquid, to prevent process contamination. Then vacuum bagged at ambient room conditions.
Process fitting options:	1/16", 1/8", 1/4" or 6mm tube compression, VCR, VCO or NPT(F), 3.2 mm UPG, Down Port ANSI/ISA 76.00.02 (See Model Code).
Electrical connections:	IP40: 15 pin D-Type connector. (See Figure 3). IP65: Unpluggable Terminal Block 28-16 Awg. IP65XP: ¾" NPT wiring access to IP40 Device with 15 pin D-Type connector.
Dimensions:	See Figures 1&2 and Figures 4 thru 7
Functional Specifications	
Output signals ⁽¹⁰⁾ :	<ul style="list-style-type: none"> • 4-20 mA or 0-5 Vdc active outputs represent mass flow or volume flow. • And simultaneously available 4-20 mA or 0-5 Vdc active output, represents on-line density or temperature information. • Alarm output, max. voltage 30 Vdc, max. current 100 mA.
Input signals ⁽¹⁰⁾ :	<ul style="list-style-type: none"> • Command (setpoint) that drives the control valve, either 4-20 mA or 0-5 Vdc input signals. • Valve Override Function: Left floating/unconnected - instrument controls flow at setpoint Connected to signal at or above 5.0 Volts -valve is forced open Connected to signal at or below 0.0 Volts -valve is forced closed
Power Requirements:	
Voltage:	+14 to 27 Vdc.
Nominal Current:	Controller: 300 mA to 400 mA Meter: 100 mA to 150 mA
Maximum Current:	Controller: 715 mA @ 14 Vdc Meter: 470 mA @ 14 Vdc
Maximum Power:	Controller: 10.0 W

Data Sheet

DS-CM-QmB-eng
May, 2008

QmB Series IP40, IP65, IP65XP

Additional Functions and Outputs

Meter: 6.6 W

Damping:

Factory set time constant from 0 to 10 seconds.

Alarms and Warnings:

Alarms accessed via HART or the Brooks Service Tool can be configured to monitor the following variables:

- Mass Flow
- Density
- Volumetric Flow
- Temperature
- Slug Flow
- Diagnostic Failure
- Setpoint Deviation
- Valve Drive

LED's: ⁽¹¹⁾

'STAT'

solid green: system operative.

solid red: system fault.

'AL'

flashing green: warning

flashing red: alarm

Pushbutton: ⁽¹²⁾

'ZERO' setting pushbutton.

Notes (continued)

⁽¹⁰⁾ If QUANTIM is configured for HART[®] communication protocol, only 4-20 mA I/O option is available.

⁽¹¹⁾ IP65 and IP65XP Series external housing cover must be removed to gain access to status LED's.

⁽¹²⁾ IP65XP series external housing cover must be removed to gain access to zero push button.

TRADEMARKS

Brooks Brooks Instrument, LLC
 Brooks Service Tool Brooks Instrument, LLC
 QUANTIM Brooks Instrument, LLC
 HART HART Communications Foundation
 Hastelloy Haynes International
 Kalrez DuPont Dow Elastomers
 Viton DuPont Performance Elastomers
 VCO Cajon Co.
 VCR Cajon Co.

QUANTIM Patent Numbers as follows:

Argentina AR026329B1, AR021594B1
 Australia 778137, 771345, 782183
 China ZL00817949.2, ZL02823425.1, 171140
 Federation of Russia 2272257, 2263284, 2277227
 Germany 40004270.3
 Hong Kong HK1051720
 India 199406
 Indonesia ID0015789
 Japan 1111950, 3904926
 Malaysia MY-128330-A
 Mexico 242129, 244688, 231280
 Singapore 88632, 81430, 103761
 South Korea 678430
 Switzerland 127118
 UK 2092458
 US D436876, 4843890, 4996871, 5231884, 5295084,
 5555190, 5687100, 5929344, 6226195, 6476522, 6487507,
 6505131, 6505135, 6512987, 6513392, 6526839, 6748813,
 6769301, 7032462, 7111519, 7117751, 7114517, 7204679
 Counterparts in other countries and other patents pending

QmB Series IP40, IP65, IP65XP

Certifications and Approvals**IP40 Series**

Non Incendive/ Non Sparking
United States and Canada- UL Recognized E73889, Vol. 3, Sect. 3.

Non Incendive , Class I, Division 2, Groups A, B, C and D; T4
Per UL 1604, UL 508 and CSA 22.2 No. 213 1987; C22.2 No. 14-M91

Ex nC IIC T4
Per CSA E79-15

Class I, Zone 2, AEx nC IIC T4
Per ANSI/UL 60079-15

Ambient Temperature: 0° C to 65° C

Enclosure: Type 1/ IP40

Europe - KEMA 04ATEX1241 X



II 3 G EEx nA II T4
Per EN 600Y9-15: 2003

Ambient Temperature: 0°C to 65°C

Enclosure: IP40

IP65 Series

Non Incendive/ Non Sparking
United States and Canada- UL Recognized E73889, Vol. 1, Sect. 26. (conduit entry)
United States and Canada Recognized, UL E73889, Vol. 3, Sect. 3. (cable gland entry)

Non Incendive , Class I, Division 2, Groups A, B, C and D;
Dust Ignition Proof, Class II, Division 2, Groups F and G; Suitable for Class III, Division 2; T4
Per UL 1604, UL 508 and CSA 22.2 NO. 213 1987; C22.2 No. 14-M91

Ex nC IIC T4
Per CSA E79-15

Class I, Zone 2, AEx nC IIC T4
Per ANSI/UL 60079-15

Ambient Temperature: 0° C to 65° C

Enclosure: Type 4X/ IP65

Europe - KEMA 05ATEX1068 X



II 3 G EEx nA II T4
II 3 D T 135 C
Per EN 600Y9-15: 2003 and EN 50281-1-1: 1998 + A1

Ambient Temperature: 0° C to 65° C

Enclosure: IP65

Data Sheet

DS-CM-QmB-eng
May, 2008

QmB Series IP40, IP65, IP65XP

Certifications and Approvals

IP65XP Series Explosion-proof/ Flame-proof



United States and Canada- UL Recognized E73889, Vol. 1, Sect. 21.

Explosion-proof , Class I, Division 1, Groups C and D;
Dust Ignition-proof, Class II, Division 1 Groups E, F, and G;
Suitable for Class III, Division 1; T4
Per ANSI/UL 1203 and CSA 22.2 No. 30

Ex nC IIC T4
Per CSA E79-1

Class I, Zone 2, AEx nC IIC T4
Per UL 60079-1

Ambient Temperature: 0° C to 65° C

Enclosure: Type 4/ IP65

Europe - KEMA 05ATEX2052



II 2 G EEx d IIB T6

II 2 D T 85° C

Per EN 50014, EN 50018 and EN 50281-1-1

Ambient Temperature: 0° C to 65° C

Enclosure: IP65

Environmental effects

EMC effects: The Brooks QUANTIM series meets the requirements of the EMC directive 89/336EEC per EN 50081-2 and EN 61326-1. To meet these specifications, the Brooks QUANTIM device must be directly connected to a low impedance (less than 1 Ohm) earth ground. Signals must use a standard twisted-pair, shielded instrument wire.

Pressure effects: The Brooks QUANTIM series meets the requirements of the Pressure Equipment Directive 97/23/EC. The unit falls into the category "Sound Equipment Practice".

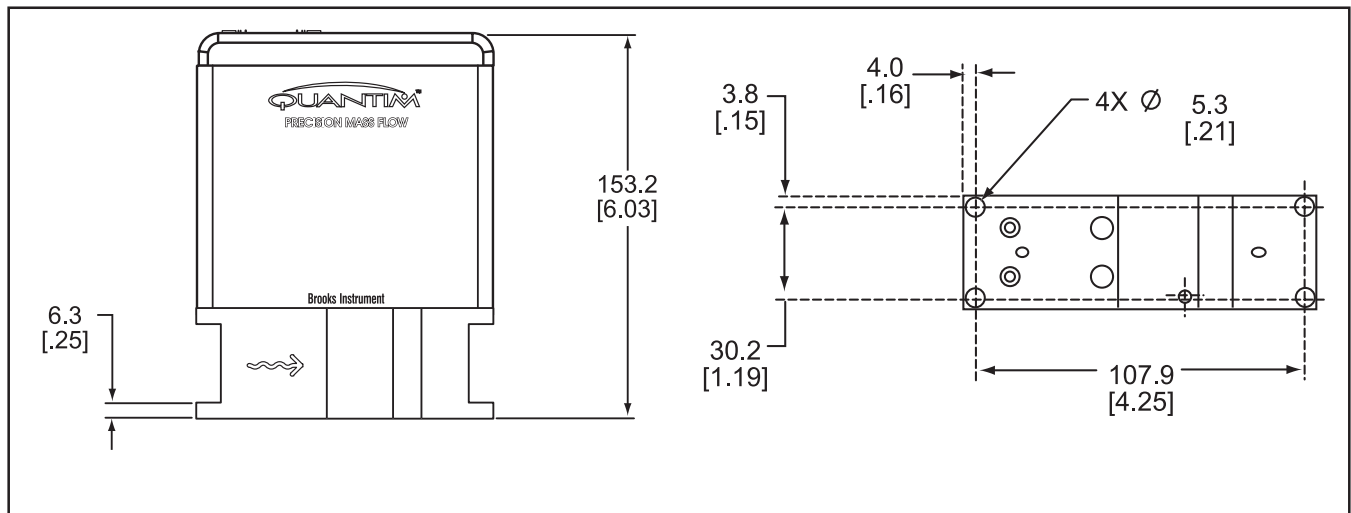


Figure 1 Dimensional Drawing QmB IP40 Downported

QmB Series IP40, IP65, IP65XP

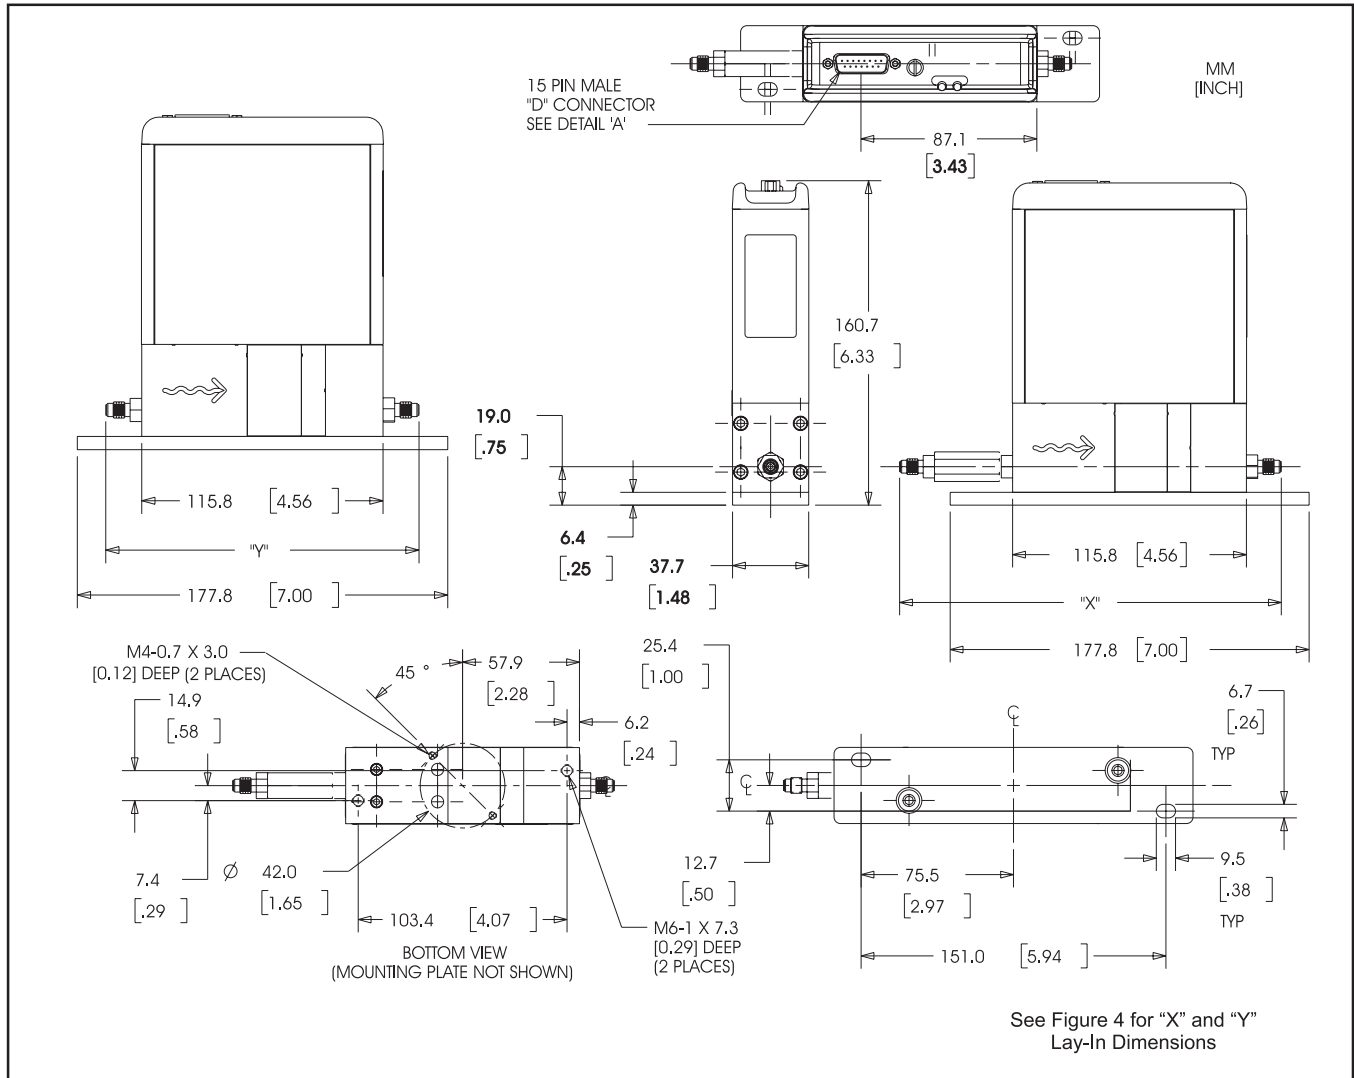


Figure 2 Dimensional Drawing QmB IP40

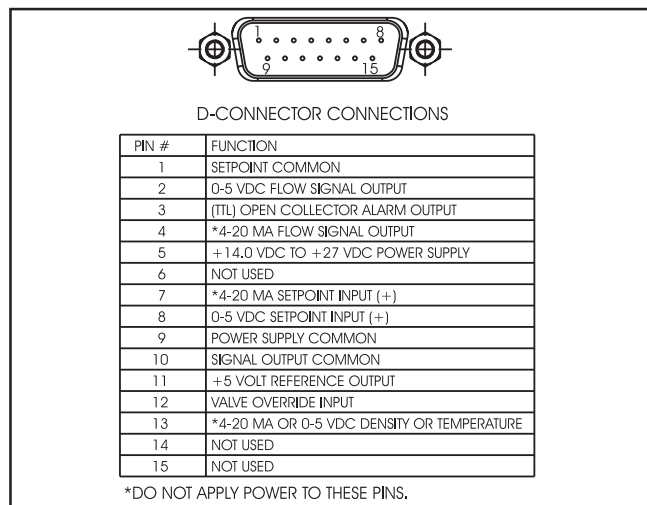


Figure 3 D-Connector Electrical Pin Connections

LAY-IN DIMENSIONS	INTEGRAL VALVE		REMOTE VALVE	
	"X" Dimension	"Y" Dimension	"X" Dimension	"Y" Dimension
FITTING				
1/16" Tube	184.1 [7.25]*	151.9 [5.98]*	340.1 [13.39]	307.9 [12.12]
Compression	167.3 [6.59]**	135.1 [5.32]**	323.3 [12.73]	291.1 [11.46]
1/8" Tube	192.7 [7.59]*	160.5 [6.32]*	348.7 [13.73]	316.5 [12.46]
Compression	167.3 [6.59]**	135.1 [5.32]**	323.3 [12.73]	291.1 [11.46]
1/4" Tube	197.3 [7.77]*	165.1 [6.50]*	353.6 [13.92]	321.4 [12.65]
Compression	166.8 [6.57]**	134.6 [5.30]**	323.1 [12.72]	290.9 [11.45]
6 mm Tube	197.6 [7.78]*	165.4 [6.51]*	353.9 [13.93]	321.7 [12.67]
Compression	167.0 [6.78]**	134.8 [5.31]**	323.2 [12.72]	291.0 [11.46]
1/8" NPT (F)	179.9 [7.08]	147.7 [5.81]	335.9 [13.22]	303.7 [11.96]
1/4" NPT (F)	189.3 [7.45]	157.1 [6.19]	345.3 [13.59]	313.1 [12.33]
1/8" VCR	182.6 [7.19]	150.4 [5.92]	338.6 [13.33]	306.4 [12.06]
1/4" VCR	200.9 [7.91]	168.7 [6.64]	356.2 [14.02]	324.0 [12.76]
1/4" VCO	188.2 [7.41]	156.0 [6.14]	344.2 [13.55]	312.0 [12.28]
3.2MM UPG	N/A	150.3 [5.92]	N/A	N/A
ANSI/ISA 76.00.02	N/A	Contact Factory	Not Available	

* OVERALL LENGTH FINGER TIGHT
 ** OVERALL LENGTH DIMENSION IS TO THE INTERNAL TUBE LOCATING SHOULDER

MM [INCH]

Figure 4 Lay-In Dimensions Integral and Remote Valves

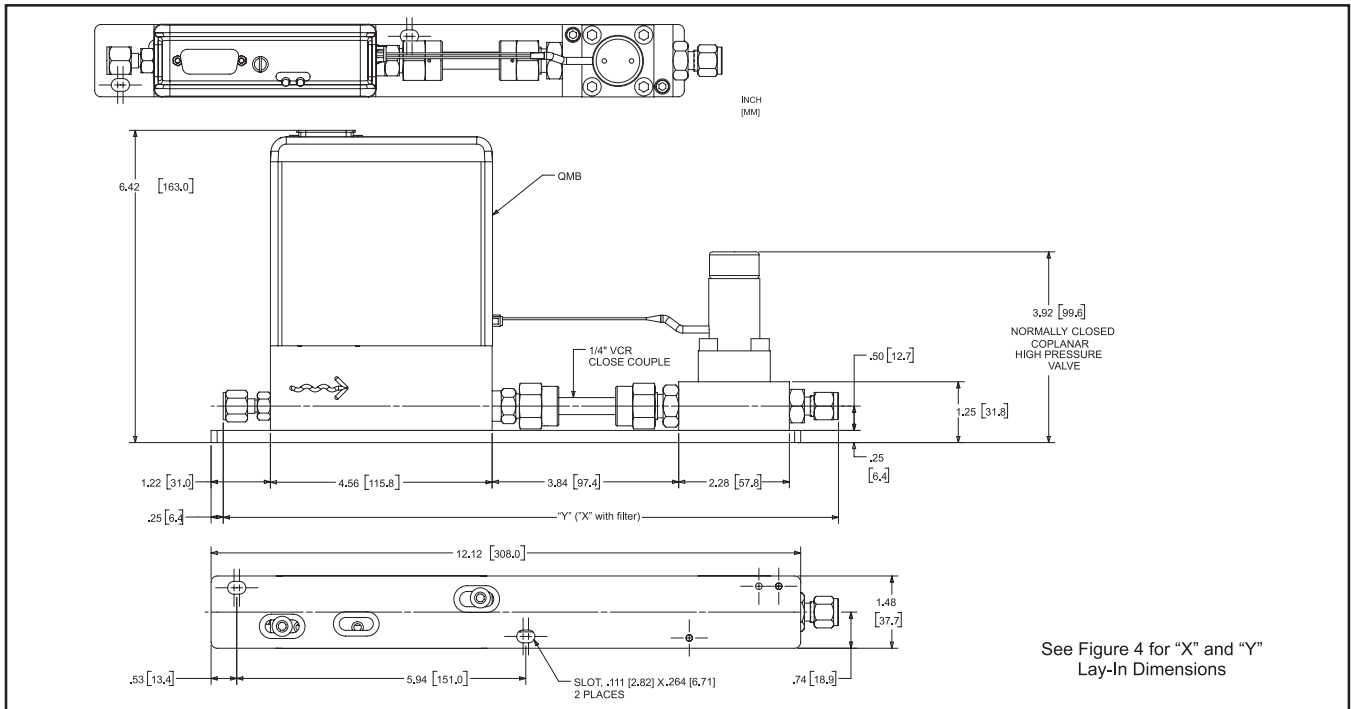


Figure 5 Dimensional Drawing QmB IP40 with Remote Valve


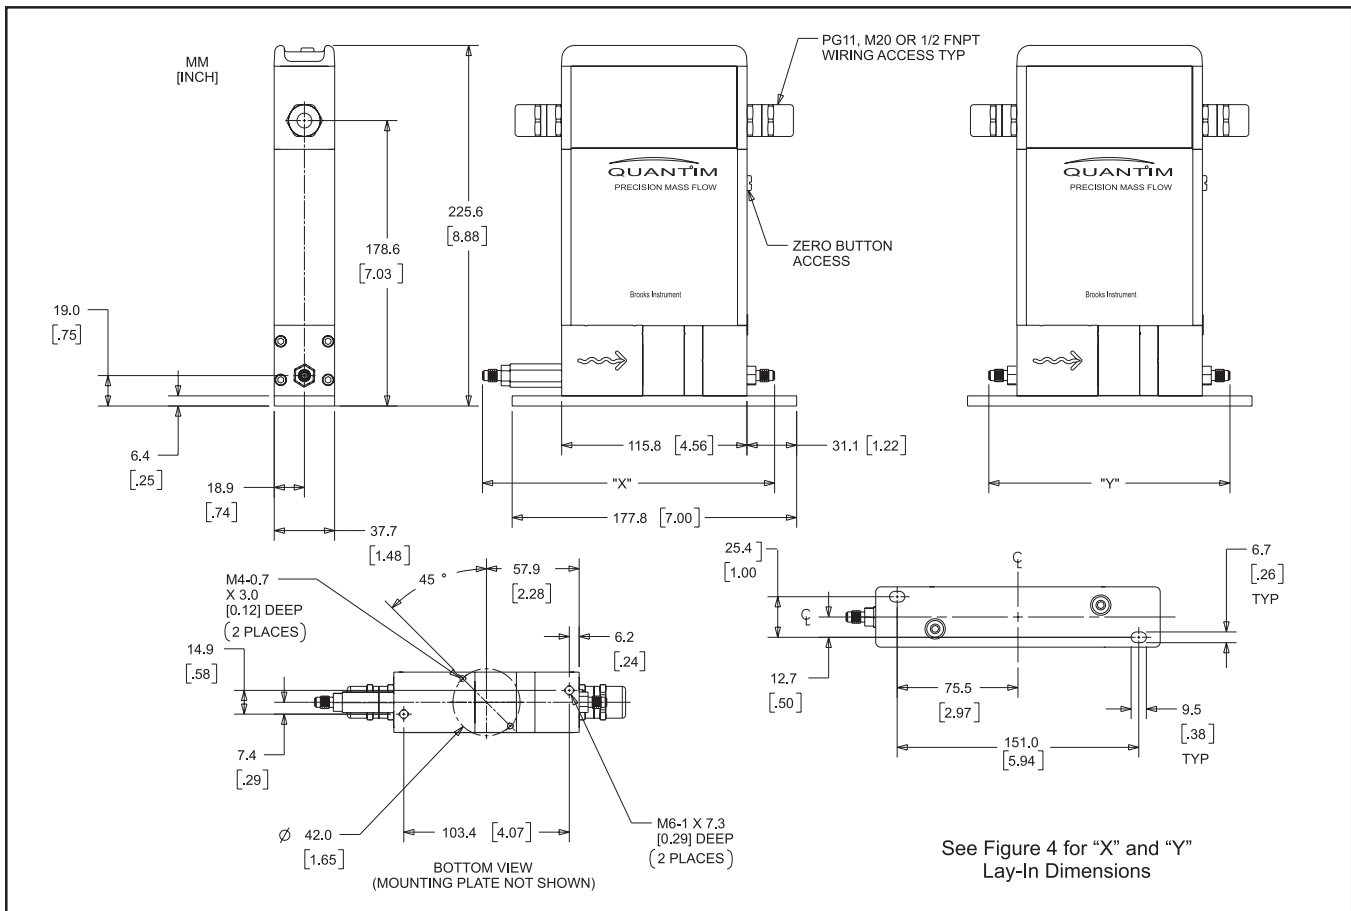


Figure 6 Dimensional Drawing QmB IP65

QmB Series IP40, IP65, IP65XP

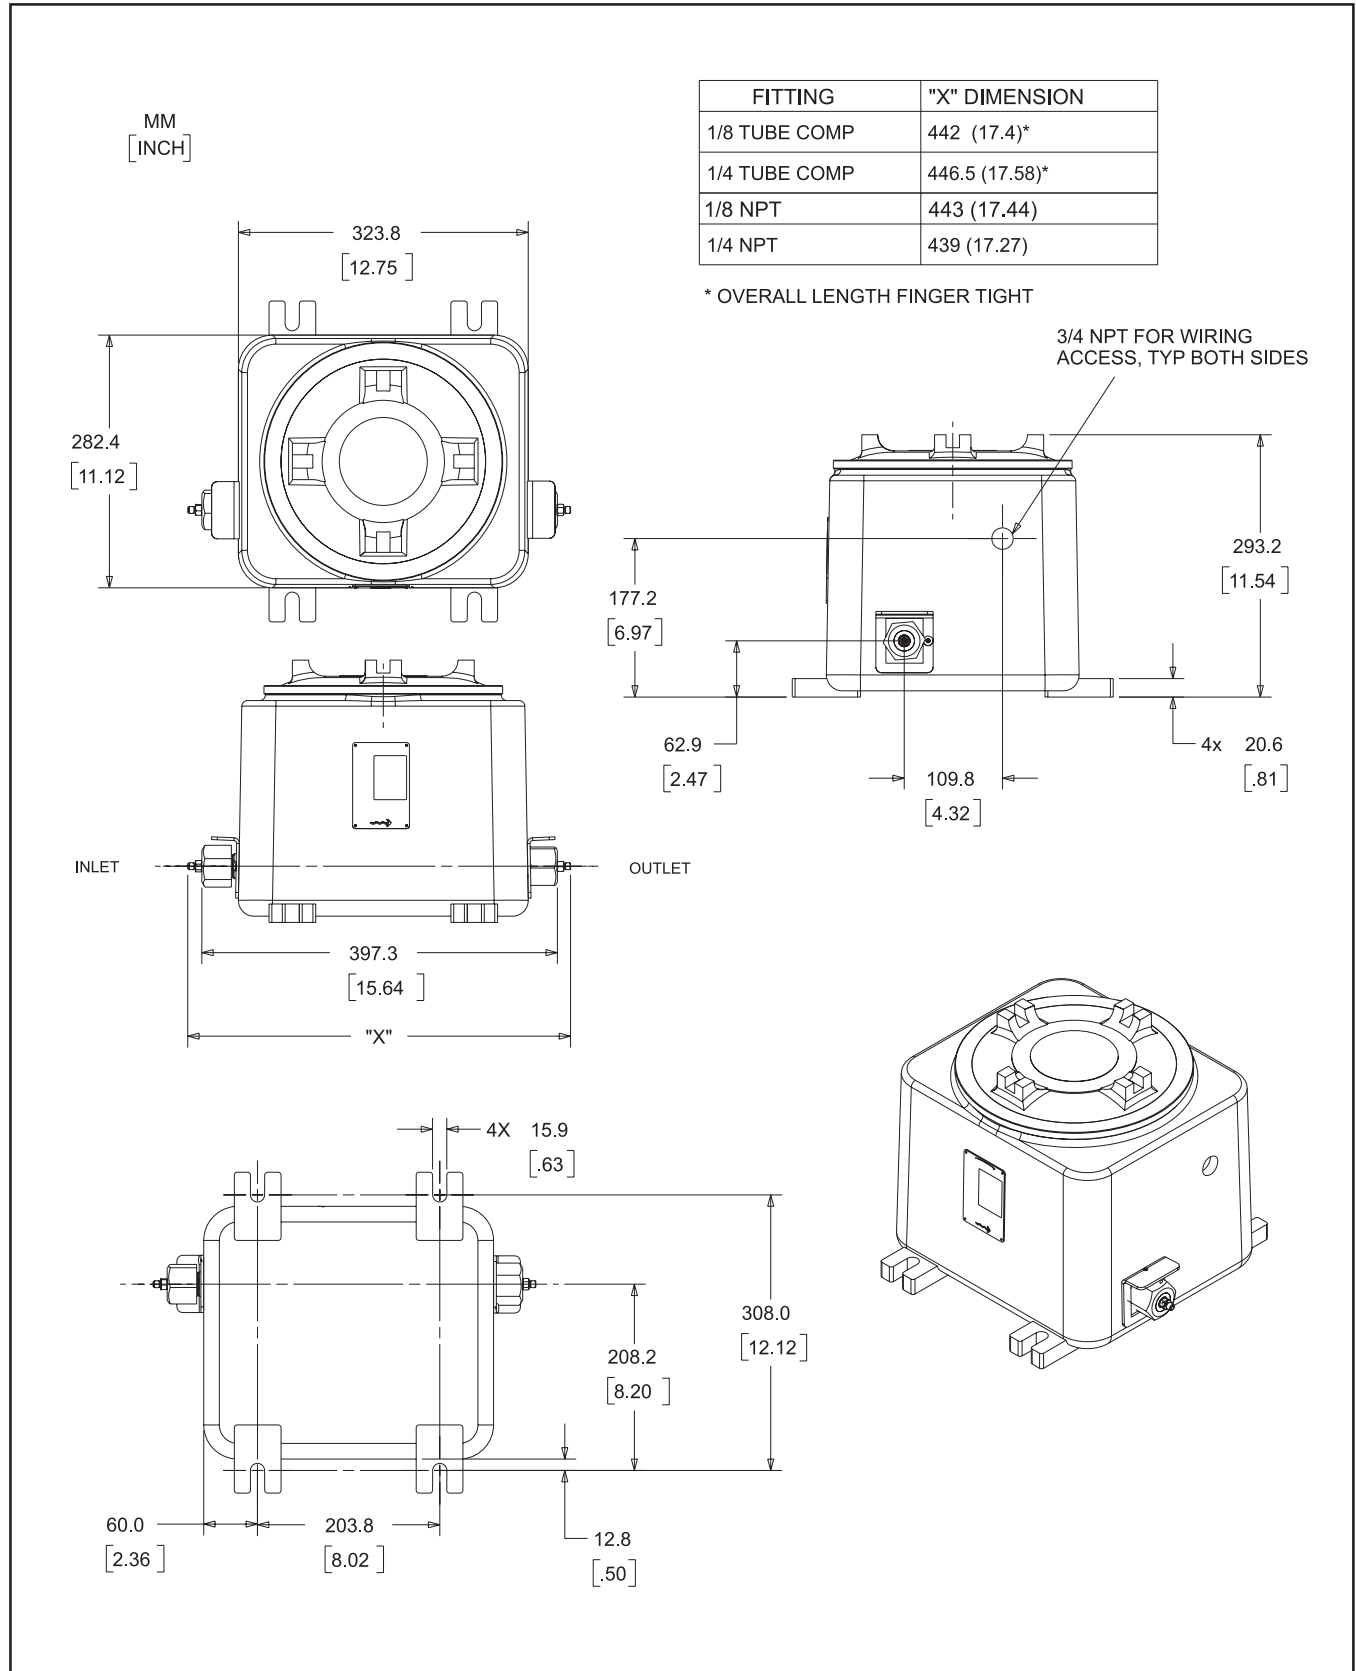

Data Sheet

DS-CM-QmB-eng

May, 2008

QmB Series IP40, IP65, IP65XP

Model Code for QM Series, Multivariable Precision Mass Flow Measurement and Control

OPTION						SELECTION
QMBC	FLOW CONTROLLER					
QMBM	FLOW METER					
QMBS	FLOW SENSOR (REQUIRES SELECTION OF NEMA 4X/IP65 OPTION)					
OPTION	TUBE SIZE	SENSOR/METER NOM. FLOW		CONTROLLER NOMINAL FLOW		SELECTION
		LIQUID	GAS	LIQUID	GAS	
2	2	190 GRAMS/HOUR	1432 SCCM	150 GRAMS/HOUR	1051 sccm	
3	3	1.00 KG/HOUR	5.595 SLPM	780 GRAMS/HOUR	2.96 SLPM	
4	4	13.5 KG/HOUR	53.12 SLPM	7.97 KG/HOUR	24.79 SLPM	
OPTION	FLUID TYPE					SELECTION
G	GAS					NOTE: SELECT PRIMARY FLUID TYPE. USER CAN SWITCH FROM LIQUID TO GAS AND VISA-VERSA. REZEROING IS REQUIRED.
L	LIQUID					
OPTION	PRESSURE TRANSDUCER					SELECTION
1	NO TRANSDUCER					
OPTION	VALVE TYPE					SELECTION
A	NO VALVE (PRODUCT TYPE = FLOW METER / SENSOR)					
B	NORMALLY CLOSED INTERNAL VALVE					
OPTION	ACCURACY					SELECTION
2	STANDARD 0.2% OF RATE		LIQUID & STAINLESS STEEL			
3	OPTIONAL 0.5% OF RATE		LIQUID & STAINLESS STEEL			
3	STANDARD 0.5% OF RATE		GAS OR HASTELLOY			
4	OPTIONAL 1.0% OF RATE		GAS OR HASTELLOY			
OPTION	ENCLOSURE TYPE	AREA CLASSIFICATION			SELECTION	
A	NEMA 1 / IP 40				(METER OR CONTROLLER)	
B	NEMA 1 / IP 40	CLASS 1 DIV 2 ZONE 2			(METER OR CONTROLLER)	
C	NEMA 4X / IP 65				(SENSOR, METER, CONTROLLER)	
D	NEMA 4X / IP 65	CLASS 1 DIV 2 ZONE 2			(SENSOR, METER, CONTROLLER)	
E	EXPLOSION PROOF	DIV 1 / ZONE 1			(METER OR CONTROLLER)	
OPTION	SURFACE FINISH					SELECTION
1	STANDARD SURFACE FINISH (32 Ra)					
OPTION	SENSOR TUBE MATERIAL					SELECTION
A	STAINLESS STEEL, 316L		MAXIMUM PRESSURE <= 100 BAR/1500 PSI			
B	HASTELLOY, C22 (TUBES ONLY)		MAXIMUM PRESSURE <= 300 BAR/4500 PSI			
OPTION	MAXIMUM PRESSURE RATING					SELECTION
1	35 BAR OR 500 PSI					
2	100 BAR OR 1500 PSI					
3	300 BAR OR 4500 PSI TUBE MATERIAL = HASTELLOY (METER OR SENSOR)					
OPTION	MAXIMUM TEMPERATURE RATING					SELECTION
A	65 DEG C					
OPTION	PROCESS CONNECTIONS					SELECTION
1A	STANDARD BODY CONNECTIONS 5/16"-24 UNF			(SEAL CODE A-J)		
1B	1/16" TUBE COMPRESSION FITTINGS			(SEAL CODE A-J)		
1C	1/4" TUBE COMPRESSION FITTINGS			(SEAL CODE A-K)		
1D	1/8" TUBE COMPRESSION FITTINGS			(SEAL CODE A-J)		
1G	6MM TUBE COMPRESSION FITTINGS			(SEAL CODE A-K)		
1J	1/8" NPT (F)			(SEAL CODE A-J)		
1K	1/4" NPT (F)			(SEAL CODE A-J)		
1L	1/8" VCR			(SEAL CODE A-K)		
1M	1/4" VCR			(SEAL CODE A-K)		
1P	1/4" VCO			(SEAL CODE A-J)		
1Y	DOWN PORT ANSI/ISA-76.00.02			(SEAL CODE A-E)		
2A	3.2MM UPG			(SEAL CODE K)		
OPTION	ELECTRICAL I/O - COMMUNICATIONS					SELECTION
	PRIMARY OUTPUT	SECONDARY OUTPUT				
A	0-5 VDC	4-20 MA	(METER OR CONTROLLER)			
B	4-20 MA	4-20 MA	(METER OR CONTROLLER)			
C	0-5 VDC	0-5 VDC	(METER OR CONTROLLER)			
H	HART / 4-20 MA	HART / 4-20 MA	(METER OR CONTROLLER)			
M	MODBUS	MODBUS	(SENSOR)			
OPTION	ELECTRICAL CONNECTION					SELECTION
1	15 PIN D TYPE	ENCLOSURE = NEAMA 1 / IP40		(METER OR CONTROLLER)		
2	4 PIN CIRCULAR	ENCLOSURE = NEAMA 1 / IP65		(SENSOR)		
3	PG11 CABLE GLAND	ENCLOSURE = NEAMA 1 / IP65		(METER OR CONTROLLER)		
4	1/2" FNPT CONDUIT	ENCLOSURE = NEAMA 1 / IP65		(METER OR CONTROLLER)		
6	M20 FNPT CONDUIT	ENCLOSURE = NEAMA 1 / IP65		(METER OR CONTROLLER)		
8	3/4" FNPT CONDUIT	ENCLOSURE = EX PROOF		(METER OR CONTROLLER)		

QmB Series IP40, IP65, IP65XP

Model Code for QmB (continued)

SEALS						SELECTION
OPTION	SENSOR	VALVE STEM	FITTING	ORIFICE SEAL	NOTE:	
A	VITON	VITON	VITON	STAINLESS STEEL	Process connection code 1A and 1Y have no fitting seals (CONTRLR)	
B	BUNA	BUNA	BUNA	STAINLESS STEEL		
C	KALREZ	KALREZ	KALREZ	STAINLESS STEEL		
E	EPDM	EPDM	EPDM	STAINLESS STEEL		
F	NICKEL	NICKEL	VITON	STAINLESS STEEL		
G	NICKEL	NICKEL	BUNA	STAINLESS STEEL		
H	NICKEL	NICKEL	KALREZ	STAINLESS STEEL		
J	NICKEL	NICKEL	EPDM	STAINLESS STEEL		
K	NICKEL	NICKEL	NICKEL	STAINLESS STEEL		
OPTION VALVE SEAT MATERIAL						SELECTION
1	NONE			(METER OR SENSOR)		
7	MATERIAL 17-7PH STAINLESS STEEL			(CONTROLLER)		
OPTION SPECIAL PROCESSING						SELECTION
A	NONE					
B	CERTIFIED MATERIAL 2.2 EN 10204					
C	CERTIFIED MATERIAL 3.1 EN 10204					
D	CLEANING FOR OXYGEN SERVICE					
E	CLEAN FOR O2 + CERT MATERIAL 2.2EN10204					
F	CLEANING FOR O2 + CERT MATATERIAL 3.1EN10204					
OPTION QUALITY CERTIFICATIONS						SELECTION
1	NONE					
2	CALIBRATION CERTIFICATION TRACEABLE TO NIST					
3	CALIB. MEASUREMENT CAPABILITY CERT (NMI)					
4	CERTIFICATE OF CONFORMANCE					
5	CALIB. CERT TRACEABLE TO NIST + C OF C					
6	CALIB. MEASUREMENT CAPABILITY CERT + C OF C					
OPTION INLINE FILTER						SELECTION
A	NONE			(METAL SEAL OR DOWNPORT)		
B	INLINE FILTER CARTRIDGE FILTER, 10 MICRON		B or F RECOMMENDED FOR QMBC2			
C	INLINE FILTER CARTRIDGE FILTER, 20 MICRON					
D	INLINE FILTER CARTRIDGE FILTER, 30 MICRON					
E	INLINE FILTER CARTRIDGE FILTER, 40 MICRON					
F	INLINE FILTER CARTRIDGE FILTER, 1 MICRON		B or F RECOMMENDED FOR QMBC2			
OPTION OEM CODE						SELECTION
A	BROOKS					
N	NO LOGO					

BROOKS LOCAL AND WORLDWIDE SUPPORT

- Brooks Instrument provides sales and service facilities around the world.
- Calibration facilities are available in local sales and service offices. Certified by our local Weights and Measures Authorities and traceable to the relevant international standards.

START-UP SERVICE AND IN-SITU CALIBRATION

- Brooks Instrument can provide start-up service prior to operation when required, if necessary under in-situ conditions, and the results will be traceable to the relevant international quality standards.

CUSTOMER SEMINARS AND TRAINING

- Brooks® can provide customer seminars and dedicated training to engineers, end users and maintenance persons.

TECHNICAL ASSISTANCE:

Americas ☎ 1-888-554-FLOW
 Europe ☎ +(31)-318-549-290 Within Netherlands ☎ 0318-549-290
 Asia ☎ +011-81-3-5633-7100



Due to Brooks Instrument's commitment to continuous improvement of our products, all specifications are subject to change without notice.

Brooks Instrument
 407 West Vine Street
 P.O. Box 903
 Hatfield, PA 19440-0903 USA
 T (215) 362-3700
 F (215) 362-3745
 E-Mail BrooksAm@EmersonProcess.com
www.BrooksInstrument.com

Brooks Instrument
 Neonstraat 3
 6718 WX Ede, Netherlands
 T 31-318-549-300
 F 31-318-549-309
 E-Mail BrooksEu@EmersonProcess.com

Brooks Instrument
 1-4-4 Kitasuna Koto-Ku
 Tokyo, 136-0073 Japan
 T 011-81-3-5633-7100
 F 011-81-3-5633-7101
 E-Mail BrooksAs@EmersonProcess.com